


ASHLEY SLING, INC.

Two Leg Basket Slings

ASI-253-C

Two Rope Legs and Oblong Link with Flemished Loops.

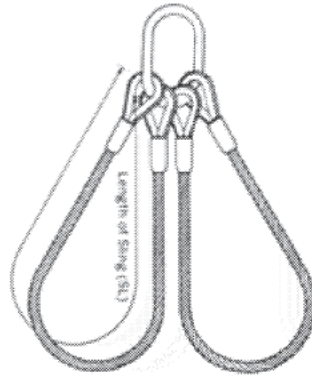

Diameter of Rope (inches)	Rated Capacities* in Tons When Used	
	60°	45°
3/8	5	4
1/2	8.8	7.2
5/8	13.6	11
3/4	19.4	15.8
7/8	26	22
1	34	28
1 1/8	42	34
1 1/4	52	42
1 3/8	62	50
1 1/2	74	60
1 3/4	98	80
2	126	104 [®]

*Rated capacities are given in tons of 2000 lb. using EIPS rope with IWRC.

*Rated capacities of basket hitches are based on minimum diameter of curvature at the point of load contact of 25 times the rope diameter.

-----Larger sizes available upon request-----

WARNING: Do not exceed rated capacities. Failure to follow proper inspection, care and use criteria may result in personal injury or death.

