
ASHLEY SLING, INC.

ASI-135-C / ASI-136-C / ASI-137-B / ASI-138-B

Slings with Single-Rope Legs. Flemished Loops and Choker Hooks.

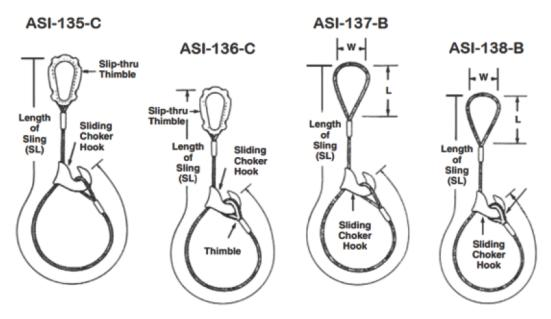

Sling #135 is similar to #136, but has a spliced loop on the load end in place of a thimble.

Sling #138 is similar to #137, but has a thimble on the load end in place of a spliced loop.

Diam. of Rope	Rated Capacity in Tons* (2000 lb.)	Slip-thru Thimble	Spliced Loops		Sliding Choker Hooks	
(inches)	EIPS	Size	Width	Length	Size	Weight
	IWRC	Number	(inches)	(inches)	Number	(lbs.)
1/4	.48	W-2	/ 2	4	1/4 - 5/16	1.0
3/8	1.1	W-2	9 3	6	3/8	0.8
1/2	1.9	W-3	4	8	1/2	1.25
5/8	2.9	W-4	5	10	5/8	2.5
3/4	4.1	W-4	6	12	3/4	4.5
7/8	5.6	W-5	7	//14	7/8 - 1	10
1	7.2	W-5	8 🖟	/ 16	7/8 - 1	10
1 1/8	9.1	W-6	9	18	1 1/8 - 1 1/4	26
1 1/4	11	W-6	<i>A</i> 10	20	1/1/8 - 1 1/4	26
1 3/8	13	W-7	# 11	22	1 3/8 - 1 1/2	42
1 1/2	16	W-7	12	24	13/8 - 1 1/2	42

^{*}Rated capacities of choker hitches apply when the angle of choke is greater than 120°.

WARNING: Do not exceed rated capacities. Failure to follow proper inspection, care and use criteria may result in personal injury or death.